

BlueWave[®] 200 Version 3.0

Quick Start Instructions

1. Remove the protective cover from the Lightguide Mount.
2. Insert the large end of the Lightguide into the Lightguide Mount until it snaps into place (Figure 1). Fasten the Lightguide into place by lightly tightening the Setscrew located on the Lightguide Mount (Figure 2). A Hex Wrench is provided with the system for this purpose. The Setscrew should be tightened gently to prevent damage to the Lightguide.

NOTE: Multi-Leg Lightguides should be balanced by rotating the Lightguide to obtain the desired UV intensity of each leg before lightly tightening the Setscrew.



Figure 1. Insert Lightguide into Lightguide Mount



Figure 2. Gently Tighten Setscrew on Lightguide Mount with Hex Wrench

3. Connect the Power Cord to the Power Receptacle on the rear of the *BlueWave 200*. Plug the Power Cord into a grounded wall outlet.
4. If you will be using a Foot Pedal, connect the Foot Pedal to the Foot Pedal Connection (Figure 3) on the rear of the unit. A ground stud is also provided on the back of the *BlueWave 200* if additional grounding is desired.
5. Turn the Power Switch on (located on the rear of the unit) and press the “Bulb On” button (Figure 4). Allow the Bulb to warm up for 5 minutes.



Figure 3. Rear Connections

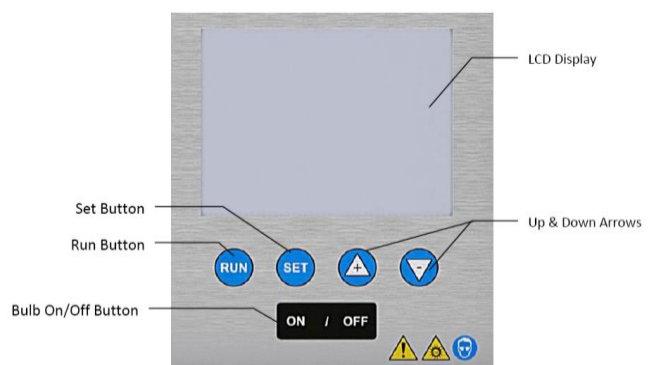


Figure 4. Front Panel Controls

6. The unit is ready for operation. The Shutter is opened and closed by means of the Foot Pedal.

Please Refer to MAN050 - BlueWave 200 Version 3.0 User Guide for Detailed Operating Instructions



© 2014 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to insure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluations. Data sheets are available for valve controllers or pressure pots upon request. QS064DA 1/2/2014

Dymax Corporation
860.482.1010
info@dymax.com
www.dymax.com

Dymax Oligomers & Coatings
860.626.7006
oligomers&coatings@dymax.com
www.dymax-oc.com

Dymax Europe GmbH
+49 (0) 611.962.7900
info_de@dymax.com
www.dymax.de

Dymax UV Adhesives & Equipment (Shenzhen) Co Ltd
+86.755.83485759
dymaxasia@dymax.com
www.dymax.com.cn

Dymax UV Adhesives & Equipment (Shanghai) Co Ltd
+86.21.37285759
dymaxasia@dymax.com
www.dymax.com.cn

Dymax Asia (H.K.) Limited
+852.2460.7038
dymaxasia@dymax.com
www.dymax.com.cn

Dymax Korea LLC
82.2.784.3434
info@dymax.kr
www.dymax.co.kr